



微調精搪單元 (XMBU)


MICRO-ADJUSTABLE FINE BORING UNIT



藉由附刻度之標示可
調整至直徑 $\phi 0.002$



兩面支撐刀片座，
達到絕佳穩定度及精度

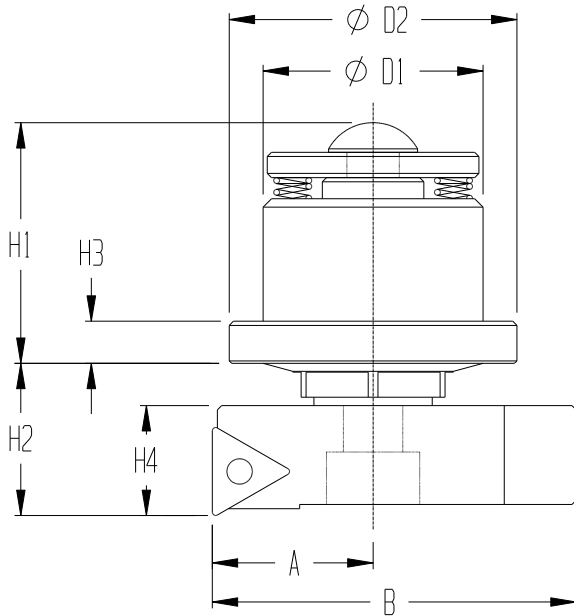

規格 SPECIFICATI	最小搪孔徑 MIN. BORING	調整範圍 ADJUSTING RANGE	使用刀片 INSERT	$\psi D1$	$\psi D2$	H1	H2	H3	H4	A	B
XMBU25	$\psi 25$	$-\psi 0.5 \sim +\psi 1.0$	TBGT060104	15	19	13.6	23.1	3	7	12.5	26
XMBU28	$\psi 28$	$-\psi 0.5 \sim +\psi 1.0$	CCGT060204	15	19	13.6	25.6	3	8.5	12.5	26
XMBU40	$\psi 40$	$-\psi 0.5 \sim +\psi 2.0$	CCGT060204	21	26	20.8	34.5	4	10	15	32.5
XMBU50	$\psi 50$	$-\psi 0.5 \sim +\psi 4.0$	TPGT110304	26	34	28.5	46.5	5	13	19	43
XMBU60	$\psi 60$	$-\psi 0.5 \sim +\psi 6.0$	CCGT09T304	26	34	33	53	5	15	19	43

微調尺寸不需鬆任何螺絲